

Kameleon K4

PRODUCT INFORMATION




ASKIA
ACOUSTIC PODS

All KAMELEONS have reversible opening doors

The door opening direction for all Kameleon booths can be switched just by rotating the frame during installation. The door handle is made from painted stainless steel. All glass panels are mounted on aluminium frames. All metal parts are powder coated with a special antimicrobial coating.

Door orientation | Door handle

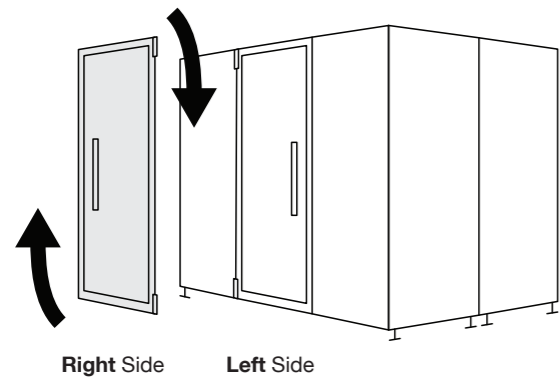

Floor



Sound absorbing polyamide carpet. The colour of the carpet always comes in Melange grey.


Lighting | Ceiling



The ceiling is always covered in Dark grey Acoustic PET Felt panels made from 100% recycled polyester fiber. The overhead LED Light ensures enough light for common activities in a K4 phone booth.


Integrated LED Spot Light
Power usage per LED: 3.8W
Input: 12V
Lumen output: 345 lumen
Color Temperature: 3000K
Color Rendering Index: 83

Digital Tools



Online Configurator

Personalize every part of your pod according to your needs. With more than 10000 options available, we did our best to ensure you can customize your acoustic booth to fit perfectly in your space. Every configuration can be easily shared.




Augmented Reality

You can virtually insert your 3d configuration in your office space using our AR button from our Online Configurator.

(Available only for iOS for the moment.)

Glass



Acoustic Laminated Glass
12mm thick acoustic laminated glass with acoustic foil ensures high soundproof performances. The acoustic interlayer also helps retain broken glass fragments if the glass is broken, reducing the risk of injuries.

Add-ons




ADA Kit



Seismic Kit




Room Booking



Sprinkler Kit

Table | Socket



All tables are made from pine plywood and laminated with antimicrobial HPL in White or Black satin finish.

2 x Power outlet
2 x USB Type B charger
2 x CAT6 Ethernet socket


Available for:

EU UK AUS US
FR BE CH

Interchangeable panels between KAMELEONS


Fabrics used in our products have OEKO-TEX STANDARD 100 label and are EU Ecolabel certified. Acoustic felt has emission class A+ and VOC (France) A+. Plywood and other composite materials used are CARB 2 compliant and have emission class E1. Foams used in our products certified by and conform to the CertiPUR standard. Acoustics foams have OEKO-TEX STANDARD 100 label. WOOD GLUE: M1 Emission Classification certification. All wood FSC / PEFC certified.

Interior Panel

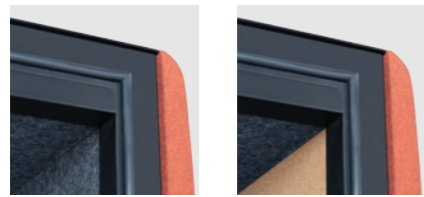

Acoustic Felt - Dark grey Acoustic Felt + Fabric

Exterior Panel

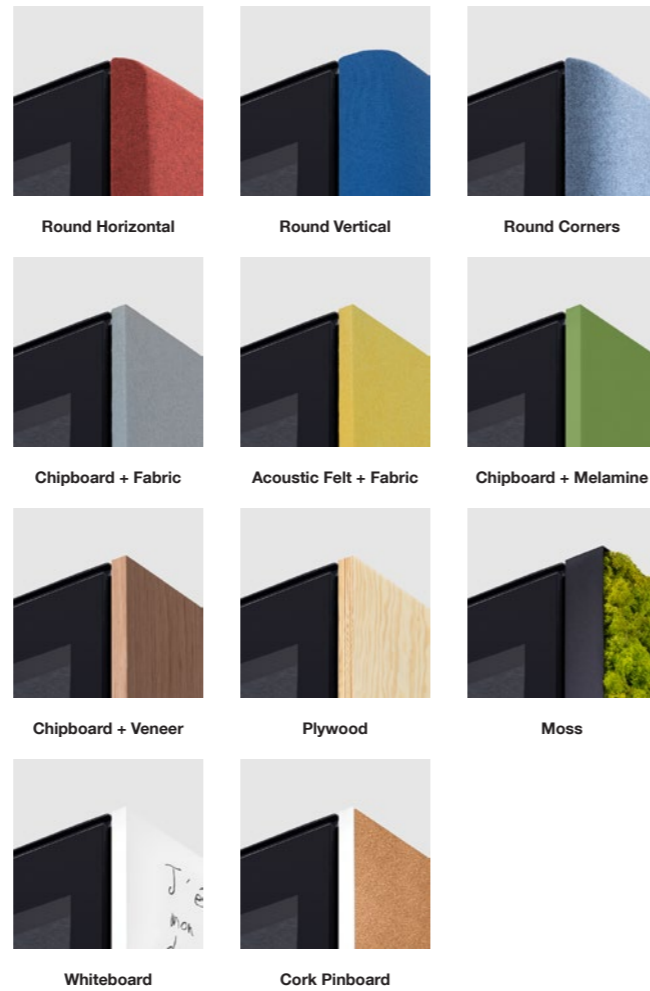

Ionized air in all KAMELEONS

Air Ionizer




Ventilation grilles are placed at the ground, as well as at the ceiling level. The one from the ground level pushes fresh, filtered air, while the one from the ceiling level removes stale air. The motion sensor activates the light and fans. After you leave the cabin, the ventilation keeps working for 15 more minutes, ensuring that all the air inside is fresh. The fans come adjusted at 100%, but they can be set to 60% and 75% as well. The air inside the booth is totally replaced, filtered and ionized every 68 to 100 seconds (depending on the pod size).

Air Ionizer

All Kameleon come standard equipped with **Air Ionizer**.


To improve the quality of the air inside the booth and implicitly ensure better health for its users in the long term, all Kameleons come standardly equipped with Air Ionizer, mounted on the ventilation system. Ionizers are particularly important for the quality of the air, as they neutralise odours and have a beneficial effect on the environment. Even if they are invisible particles, the negative ions have a very pleasant, refreshing effect, comparable to the experience of the air after a summer rain or the air in a fascinating country side area, untouched by the modern pollution.

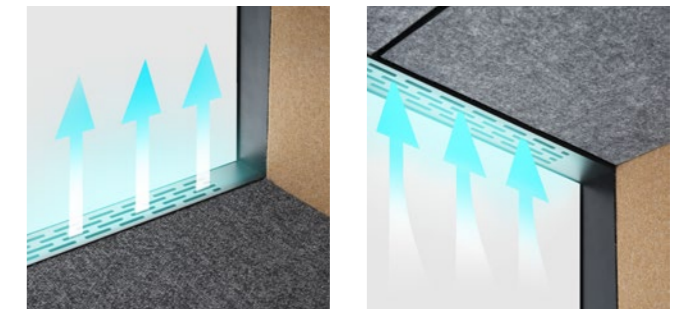


Fabrics for Interior & Exterior panels




Chipboard + Melamine for Exterior panels

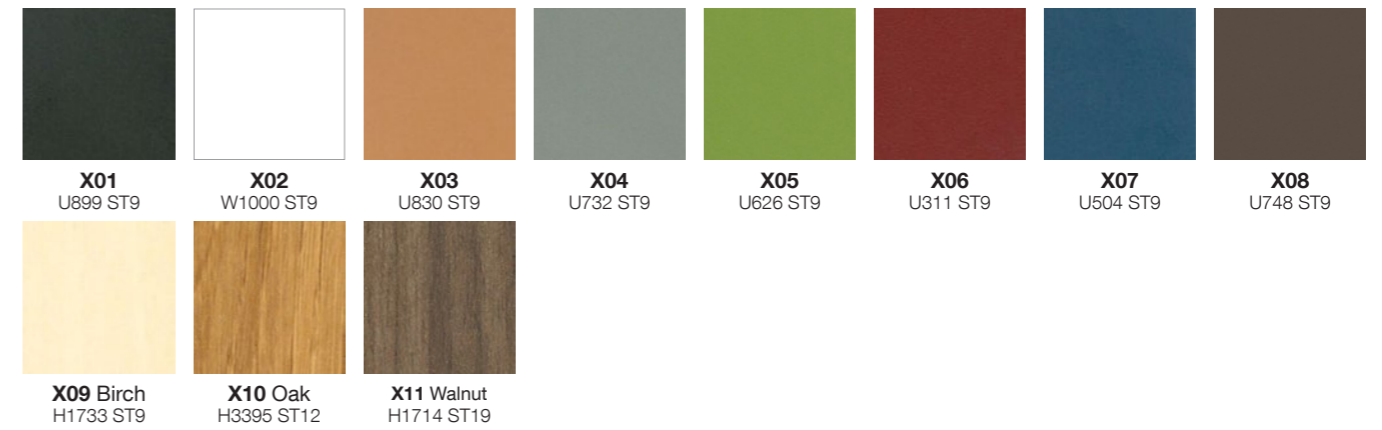

Chipboard + Veneer for Exterior panels

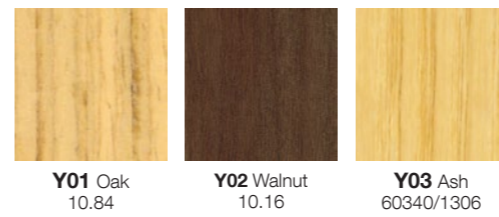


Plywood for Exterior panels




Special Finishes for Exterior panels



Green Wall for Exterior panels




Acoustic Felt for Interior panels




Carpet




Antimicrobial HPL for Table tops



Antimicrobial Coating for Metal parts



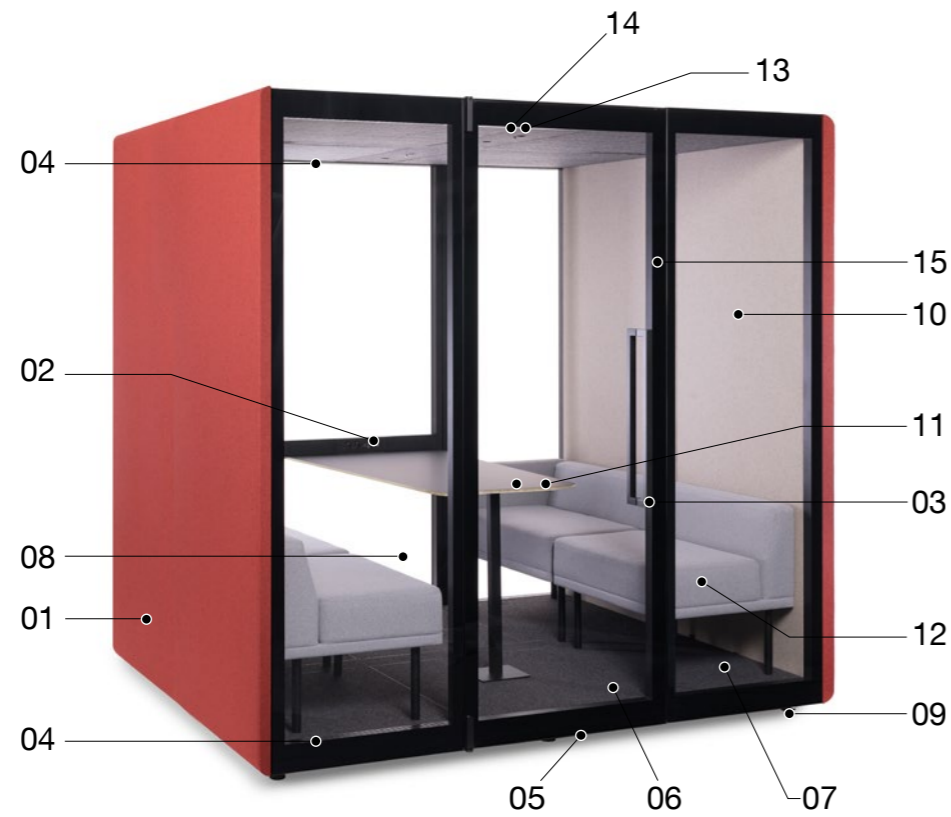

01 Exchangeable exterior panel

You can choose new panels from a variety of shapes, finishes and colours which are available to view in our [online configurator](#) or in [AR](#).

02 Connectivity

2 Power sockets - 230V, 50Hz, max 10A
2 USB Type B chargers
2 CAT6 Ethernet sockets

03 Left / Right Reversible opening door

When you install the frame, you can choose the door opening direction just by rotating it.

04 Airflow inlet & outlet

Our ventilation system is performant through its high efficiency and very silent fans.

05 Power and ethernet outlets

The power supply and ethernet outlet can be easily connected at the bottom. Each booth comes equipped with a 5m power cord.

06 Ionized and Purified air

The air pushed into the cabin is first filtered and then sanitized with an air ionizer.

07 Tufted polyamide carpet

Soft carpet with a high level of comfort and higher noise insulation impact.

08 Acoustic Laminated Glass

12mm tick acoustic laminated glass ensures high soundproof performances.

09 Levelers + Wheels

All Kameleon booths come equipped with wheels and leveling feet. Whenever you want to move your booth, you can do it very easily.

10 Interchangeable interior panel

You can choose from a variety of finishes and colours through our online configurator. If you want to get other finishes, the panels can be easily changed.

11 Table tops

All table tops are made from pine plywood and laminated with antimicrobial HPL.

12 Add-on accessories

To ease your work, we have designed some accessories. They can be ordered all together or separately.

13 LED light

The overhead warm LED Lighting ensures enough light for common activities.


14 Motion sensor

The motion sensor activates the light and fans. After you leave the cabin, the ventilation stays on for 15 more minutes, making sure that all the air inside is fresh.


15 Magnetic Lock System

The magnetic lock system makes the daily usage more comfortable. The rubber gaskets help seal the door thus minimizing the noise coming from outside.


S051




S052



S053




Tribut Bar stool




Tribut Bar stool + Cushion




T05




T055




T06




T0S6




Adjacent Side table




Exterior Hangang Whiteboard




Interior Hangang Whiteboard



Exterior Hangang Pinboard



Interior Hangang Pinboard




VESA Adapter



Coat Hanger



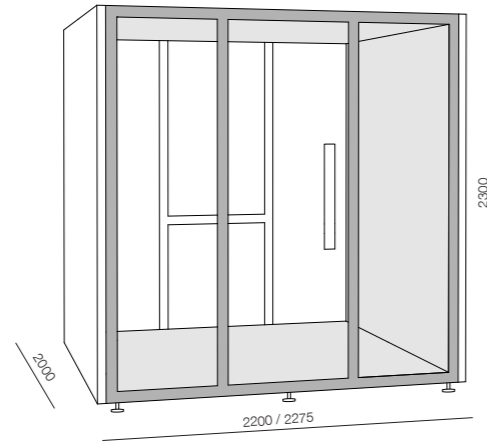

K4 can accommodate up to 6 people, if necessary, but is the perfect option for 4.

Dimensions	Exterior W 2200 D 2000 H 2300 (18mm Exterior Panels)	Energy efficiency A+ Light efficiency 312 lm/W
	Exterior W 2275 D 2000 H 2300 (55mm Exterior Panels)	3000k
	Interior W 2066 D 1976 H 2020	Stand-by mode after 2 min. of no occupation/ no motion
Weight	1040.8 kg	Ventilation
	Weight with crate 1383.86 kg	Air flow rate 115m ³ /h per fan - 8 fans
Glass Door	Laminated tempered glass 12mm	Air exchange in 82s (obtained at 100% fan speed)
	Glass Door with frame W 800 D 85 H 2195	Operating voltage 12 V
	Door Opening W 698 H 2020	Air Ionizer and particle filter
	Orientation Left & Right	Max. power 12.4W
	Magnetic closing door	Stand-by mode after 15 min. of no occupation/ no motion
Glass Wall	Laminated tempered glass 12mm	Adjustable fan speed levels: 60% 75% 100%
		Power
Interior Panels	Acoustic PET Felt Dark grey	Main supply 110 - 240V 50/ 60Hz
	Acoustic PET Felt Dark grey with various fabrics and color options	Power plug for EU (UK USA AU on request)
Exterior Panels	Round Horizontal, Round Vertical & Round Corners 55mm	Energy consumption 27.6W
	Acoustic Felt + Fabric 18mm	Stand-by consumption 3.1W
	Chipboard + Fabric 18mm	Output
	Chipboard + Melamine, Chipboard + Veneer 18mm	2 x Power socket - 230V, 50Hz, max 10A
	Plywood 18mm	2 x USB Type B charger
	Whiteboard 18mm	2 x CAT6 Ethernet socket
	Pinboard 18mm	Specifications
Moss 55mm	Sound insulation (in testing)	
Ceiling	Sandwich element of beech wood and Acoustic PET Felt	Acoustic absorption Class (in testing)
Floor	Sandwich element of beech wood	Motion sensor Lighting and Ventilation
Carpet	Tufted polyamide carpet	Wheels for easy placement
Structural Walls	Chipboard panel	Floor adjuster legs for leveling
Table <small>not included</small>	Pine Plywood Laminated with Antimicrobial and Anti fingerprint HPL Black White	Exchangeable Exterior and Interior Panels
Lighting	LED	Installation time 150 min. with 3 people
	Energy consumption 15.2W	Elevator Dimensions
	Input 12V	Elements can fit into an elevator for 8 people
		W 1100 D 1400 H 2200-3000
		WD 800 HD 2200-2400
		Metal parts
		Antimicrobial powder coated paint Satin Black Satin White
		Warranty
		2 Years

DESCRIPTION

K4 can accommodate up to 6 people, if necessary, but is the perfect option for 4.

DIMENSIONS

Exterior dimensions W 2200/2275 | D 2000 | H 2300
Interior dimensions W 2066 | D 1976 | H 2020

EXTERIOR PANELS

Exchangeable Exterior Panels
18 mm thick panels with straight edges
55 mm thick panels with round edges

Exterior Panels segments
Split (Up + Down) or Full panel option
With Split option you can combine colors
Split option helps you to carry the panels easily in a small elevator

Exterior Panels finishes
Textile, Melamine, Veneer, Plywood, Cork Pinboard, HPL Whiteboard, Moss

INTERIOR PANELS

Exchangeable Interior Panels
12 mm thick Acoustic PET Felt
Interior Panels finishes
Uncovered Acoustic PET Felt Dark grey
Acoustic PET Felt Dark grey covered in textile

DOOR

Reversible opening Left & Right (indication of door opening direction not necessary)
Laminated tempered glass 12mm (with silent foils inside)
Magnetic closing door system
Door handle coated with antimicrobial paint

BACK GLASS WALL

12 mm Laminated tempered glass

LIGHTING

LED ceiling light run by motion sensor

VENTILATION

8 Fans activated by motion sensor
Air exchange in 82s (obtained at 100% fan speed)
Air particle filter and air ionizer (against viruses)
Stand-by mode, after 15 min. no occupation
Adjustable fan speed levels: 60% | 75% | 100%
Acoustical noise with L.N.A. - 19.2dB(A) per fan

POWER CONNECTION

Main supply 110 - 240V 50/ 60Hz
Power plug for EU (UK | USA | AU on request)

POWER OUTPUT

2 Power sockets - 230V, 50Hz, max 10A
2 USB Type B chargers
2 CAT6 Ethernet sockets

METAL PARTS

Antimicrobial powder coated paint - Satin Black | Satin White finish

TABLE

optional
Pine Plywood Laminated with Antimicrobial and Anti fingerprint HPL Black | White

SPECIFICATIONS

Wheels for easy placement
Floor adjuster legs for leveling
Exchangeable Exterior and Interior Panels

CARPET

Full covered floor with sound-absorbing polyamide carpet

ACOUSTICAL PERFORMANCE

In testing

ELEVATOR

Elements can fit into an elevator for 8 people
W 1100 | D 1400 | H 2200-3000
Door W 800 | H 2200-2400

INSTALLATION

Installation time 150 min. with 3 people

The logo for ASKIA, featuring the word "ASKIA" in a bold, black, sans-serif font. The letter "A" is stylized with a horizontal line through its middle, and the letter "I" has a small horizontal bar at its base.

Eliade Tower,
Mircea Eliade No.18
RO-Bucharest, 012015

T +40 212 121 381
contact@askiafurniture.ro

www.askiafurniture.ro